

THREE PHASE STRING INVERTER 125-255 KW


CSI-125K-T600 | CSI-185K-T600 | CSI-255K-T800

CSI Solar's grid-tied, transformer-less string inverters help to accelerate the use of three-phase string architecture for medium ground-mount applications. An NRTL approved, costeffective alternative to central inverters, these inverters are modular design building blocks that provide high yield and enable significant BoS cost savings. They provide up to 99.0% conversion efficiency, a wide operating range of 480-1500 V DC, and 9-12 MPPTs for maximum energy harvest.

KEY FEATURES

- Maximum efficiency of 99.0%
- CEC efficiency of 98.3%
- 9-12 MPPTs to achieve higher system efficiency
- High current inputs to support high power and bifacial modules

EFFICIENCY CURVE CSI-255K-T800GL03-U

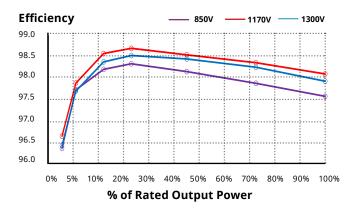

For detailed information, please refer to the Installation Manual.



10 standard warranty, extension up to 20 years

HIGH RELIABILITY

- NEMA X4 (IP66) and C5 protection level
- Intelligent redundant air cooling design
- Built in over-voltage and over-current protection
- DC reverse polarity and AC short circuit protection

BROAD ADAPTIBILITY

- Utility interactive controls: Active power derating, reactive power control and over frequency derating
- Integrated DC switches
- Wide MPPT range for flexible string sizing
- High switching frequency and ultra fast MPPT for maximum efficiency over a wide load range

CSI SOLAR CO., LTD. is committed to providing high quality solar photovoltaic modules, solar energy and battery storage solutions to customers. The company was recognized as the No. 1 module supplier for quality and performance/price ratio in the IHS Module Customer Insight Survey. Over the past 20 years, it has successfully delivered over 63 GW of premium-quality solar modules across the world.

CSI SOLAR CO., LTD.

199 Lushan Road, SND, Suzhou, Jiangsu, China, 215129 www.csisolar.com

	CSI 1254 T600CL02 11	CSL 18EK TEAACLAS H	CST SEEV TOACLAS
	CSI-125K-T600GL03-U	CSI-185K-T600GL03-U	CSI-255K-T800GL03-U
DC INPUT		1500.1/	
Max. DC Input Voltage	950 V	1500 V _{DC}	1080 V _{DC}
Rated DC Voltage	950 V _{oc}	950 V _{pc}	Ιυδυν _{ος}
Start-up DC Input Voltage	500 V _{DC}		
Number of MPP Trackers	9 12		
MPPT Voltage Range	480 - 1500 V _{DC}		
Max. Input Current (Imp)	30 A per MPPT		
Max. Short Circuit Current (Isc)	50 A per MPPT		
Number of DC Input	18 (2 per MPPT) 24 (2 per MPPT)		
DC Switch		Integrated	
Rated AC Output Power	125 kW	185 kW	255 kW
Max. AC Output Power	137.5kW	185 kW	255 kW
Rated Output Voltage	600 V _{AC}	600 V _{AC}	800 V _{AC}
Grid Connection Type		3L / PE	
Rated Grid Output Current	132.3 A	178 A	184 A
Rated Output Frequency	60 Hz		
Power Factor	> 0.99 (0.8 leading 0.8 lagging)		
Current THD		< 3 %	
SYSTEM	1		
Max. Efficiency	99.0 %		
U Efficiency	98.3 %		
Night Consumption		< 2 W	
INVIRONMENT			
Cooling	Intelligent Redundant Cooling		
Protection Degree	Туре 4Х		
Operating Temperature Range	-13 °F to +140 °F / -25 °C to +60 °C		
Storage Environment	-40 °F to +176 °F / -40 °C to +80 °C		
Operating Humidity	0 - 100 %		
Noise Emission	≤ 65dB (A)		
Operating Altitude	13120 ft / 4000 m		
DISPLAY AND COMMUNICATION			
Display	LCD		
Communication	R\$485		
MECHANICAL DATA			
Dimensions (W / H / D)	1170 x 770 x 384 mm / 46.1 x 30.3 x 15.1 inch		
Weight	109 kg / 240 lb 113 kg / 249 lb		
DC Connection	MC4		
AC Connection	OT Terminal Connectors		
Topology	Transformerless		
SAFETY			

The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. CSI Solar Co., Ltd. reserves the right to make necessary adjustment to the information described herein at any time without notice.

Caution: For professional use only. The installation and handling of PV equipment requires professional skills and should only be performed by qualified professionals. Please read the safety and installation instructions before using the product.